


schattdector

CLEAN. SIMPLE. EFFICIENT.

CLEANING FILM FOR PRESS PLATES

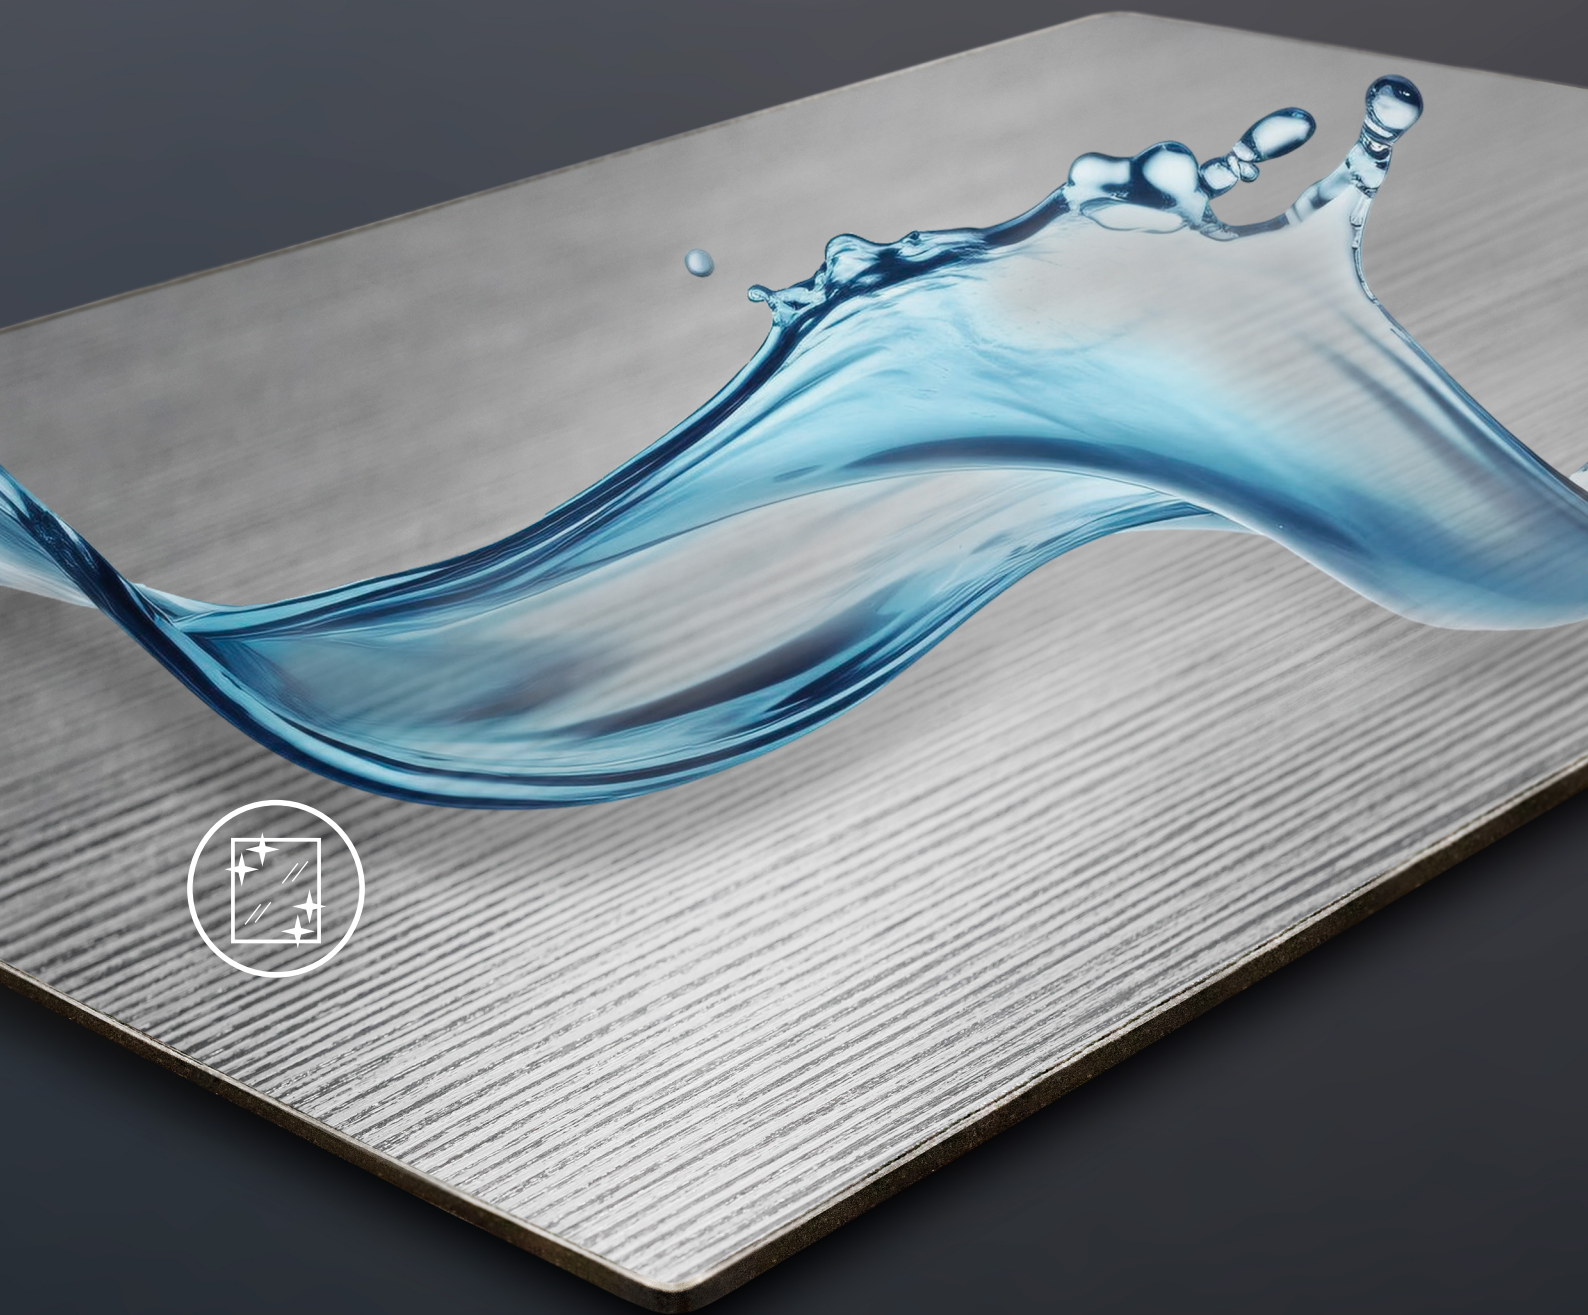

teclay **CLEANING**
by Schattdecor

CLEAN PRESS PLATES – CLEAN RESULTS

When pressing melamine-resin treated paper, deposits and contamination build up over time on short-cycle press plates or continuous double-belt presses (CPL-presses). The consequences: visible quality defects, higher reject rates, and production interruptions.

Teclay Cleaning offers a fast, effective, and safe solution—for flawless surfaces and longer-lasting press plates.


teclay **CLEANING**
by Schattdecor

Teclay Cleaning is a specially developed impregnated paper that is used as a cleaning film in the pressing process. It reliably removes even stubborn dirt and deposits, protects the surface of the press plate, and thus ensures consistently high product quality.


Due to its efficient and user-friendly handling, there is no need to remove the press plates during the cleaning process. The product can be processed at all standard temperatures and pressures with 2 to 3 times the pressing time. In this way, Teclay Cleaning supports smooth machine operation, reduces downtime, and actively contributes to time- and cost-efficient process optimization.

Your advantages at a glance

- ✓ Deep cleaning during the pressing process
- ✓ No dismantling of the press plates required
- ✓ Improvement of fine and deep structures
- ✓ Optimized heat transfer to the decorative surface
- ✓ Available as sheets or rolls
- ✓ Can be stored for over 3 years



APPLICATION EXAMPLE

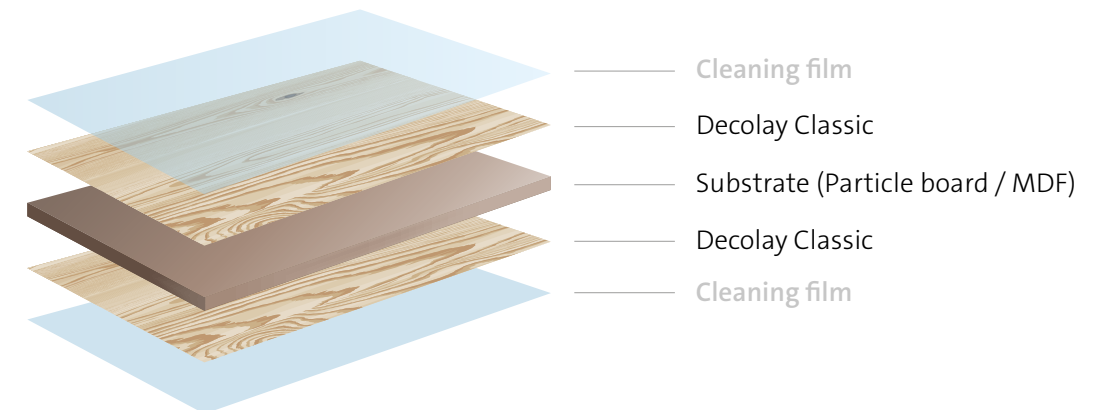

PREPARATION	Place Teclay Cleaning over melamine-resin treated papers/sheets
NUMBER OF LAYERS	1 to 2 layers, depending on the degree of contamination and the press plate structure
PRESSING PARAMETERS	Standard temperature, standard pressure, 2 to 3 times the pressing time
CYCLES	1 to 2 pressings for intensive cleaning
POST-TREATMENT	1 pressing with Teclay Conditioning for optimized separation effect. For complex press plate structures, multiple pressings may be required.

Complementary product

Teclay Conditioning – for optimum protection of the press plate surface and improved release properties after cleaning.

schattdecor One Source. Unlimited Solutions.

Scan to learn more:



Schattdecor SE
Walter-Schatt-Allee 1–3
83101 Thansau
Germany

Contact:
Dieter Schuckmann
Head of Sales Impregnation
Tel. +49 8031 275 – 2288
d.schuckmann@schattdecor.de

www.schattdecor.com